
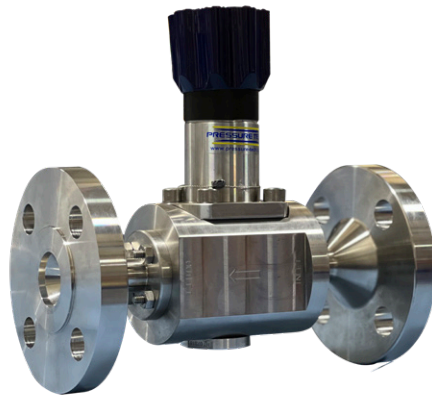


See Our Full Range of FLANGED PRESSURE REGULATORS

In addition to NPT, BSPP and medium pressure fittings, we also offer flanged connections on our full range of Pressure Tech regulators! Flanges offer easy maintenance, repair and inspection, and are typically used on Chemical Injection and Produced Water Systems.

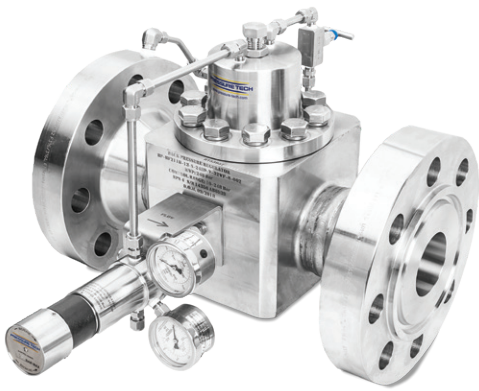

FLANGED SPECIFICATIONS

- Flanges Available on all Pressure Tech Regulators
- Fully compliant with ASME B16.5 Flanges
- ½" to 4" Nominal Bore (NB) Sizes
- Ring Type Joint, Raised Face and Flat Face
- Also Available with Hub Style Connections
- Bolted and Welded Flange Options

Our bolted flanges are based on a modular design, whereby a single design has the flexibility to accommodate multiple Pressure Tech regulators. We designed two standard versions to cover the most common requirements, those being classes 150/300/600 and 900/1500/2500.

The bolted design for flange ends and bonnets conforms to ASME VIII Div 1 App 2 & UG 34, whilst the wall thickness requirements have been calculated in line with ASME B31.3.

For a quote or for more information, please call the Pressure Tech Sales team on +44 (0)1457 899 307 or email to sales@pressure-tech.com.