

SGP Datasheet

SPECIALITY GAS POINT OF USE GAS MANIFOLD



● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Venting ● Non-Venting | Max Inlet: 50 bar (725 psi) | Max Outlet: 14 bar (203 psi) | Cv 0.1



INTRODUCING THE SGP...

The SGP is a point of use gas manifold, mounted onto a stainless steel panel (as standard), for inert, reactive, flammable, corrosive, and oxidising gases and gas mixtures, with a maximum purity of 6.0.

They are designed to accurately reduce the incoming gas supply from a maximum of 50 bar (725 psi) inlet pressure to a safe and usable level at the point-of-use.

Typical applications include gas supply to analytical instruments and engine emission testing for automotive industries.

The SGP consists of a pressure regulator, and an optional upstream shut-off valve, outlet gauge, and relief valve.

FEATURES AND BENEFITS

1 FOR HIGH PURITY GAS ≥ 6.0

Ensures the materials, design, and internal surface finish do not contaminate high purity gases.

2 ERGONOMIC DESIGN

Handwheel and body shape makes it easier for technicians to adjust pressures.

3 OPTIONAL OUTLET PRESSURE RELIEF VALVE

Automatically vents gas if downstream pressure rises above required levels.

4 LOW-PROFILE DESIGN

Compact dimensions are perfect when space is limited.

STANDARD MATERIALS OF CONSTRUCTION

PART	MATERIALS
Body and Bonnet	ASTM A479 316/316L Stainless Steel (UNS S31600/S31603)
	Chrome Plated Brass CW614N (UNS C38500)
Main Valve Pin	Hastelloy C276® (UNS N10276)
Soft Seat	PCTFE (KeI-F)
Valve Spring	Inconel® X750 (UNS N07750)
Diaphragm	Hastelloy C22® (UNS N06022)
Handwheel	Anodised Aluminium
O-Rings	FKM/FPM (Viton)
Loading Spring	Spring Steel Grade 80 BS 1449
Filter	100 Microns

Note: Pressure regulator rating may be limited by connection type, Cv and/or seat material. Contact the office for specific pressure or temperature requirements.

SPECIFICATIONS

Max. Inlet	50 bar (725 psi)
Max. Outlet	Up to 14 bar (203 psi)
Cv	0.1
Design Proof Pressure	150% max. working pressure
Seat Leakage	$< 1 \times 10^{-6}$ mbar L/s (Helium)
External Leakage	$< 1 \times 10^{-9}$ mbar L/s (Helium)
Purity	≥ 6.0
Min/Max Temperatures	-25°C to +70°C (-13°F to 158°F)
Weights	Up to 2.4kg (5.3lbs)
Dimensions	See page 2

Note: Unless otherwise requested, the relief valve's set pressure will be 120% of the regulator's nominal outlet set pressure.

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Units 1-2, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2026 Pressure Tech Ltd. All Rights Reserved.

290426

PAGE:
1 OF 4

SGP Datasheet

SPECIALITY GAS POINT OF USE GAS MANIFOLD




● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Venting ● Non-Venting | Max Inlet: 50 bar (725 psi) | Max Outlet: 14 bar (203 psi) | Cv 0.1

CLEANLINESS STANDARDS & SURFACE FINISH

All components are precision-cleaned to meet stringent cleanliness levels of 1mg/m², in accordance with ASTM G93/G93M, ASTM F331-13, and ISO 15001:2011. Brass products are electroplated as standard to enhance durability and corrosion resistance.

DRAWINGS AND INSTALLATION DIMENSIONS

Mounted on stainless-steel panel:

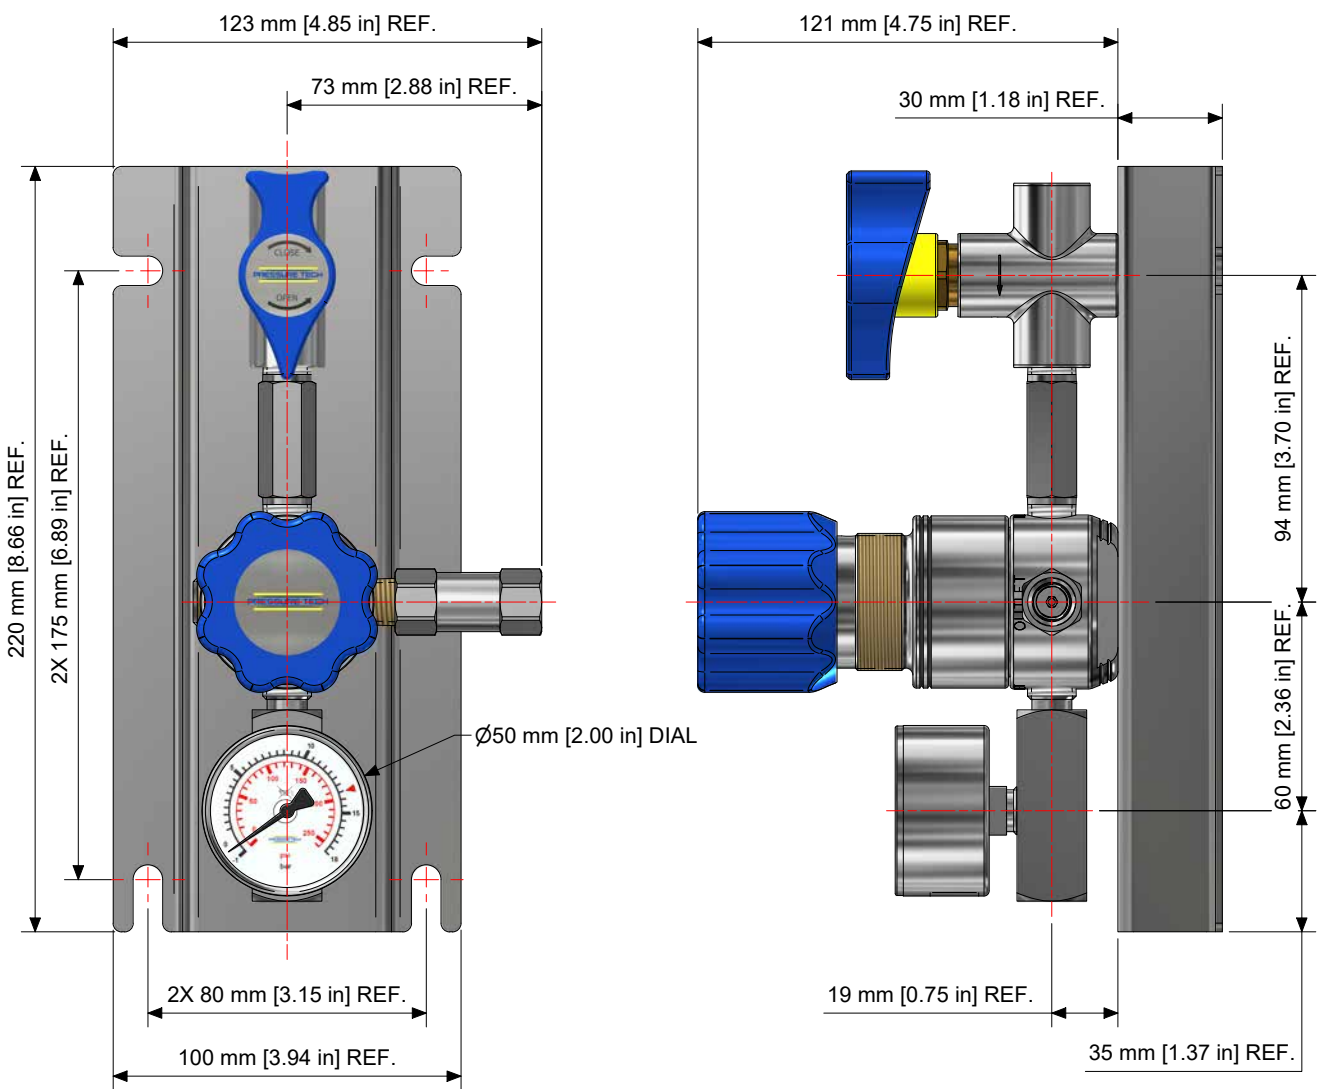

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Units 1-2, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2026 Pressure Tech Ltd. All Rights Reserved.

290426

PAGE:
2 OF 4


SGP Datasheet

SPECIALITY GAS POINT OF USE GAS MANIFOLD



● Gas ● Liquid | ● Diaphragm ● Piston | ● Self-Venting ● Non-Venting | Max Inlet: 50 bar (725 psi) | Max Outlet: 14 bar (203 psi) | Cv 0.1

P&ID

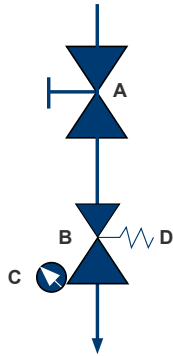


- A: Upstream shut-off valve
- B: Pressure regulator
- C: Outlet pressure gauge
- D: Relief valve

FLOW CURVE

The flow charts for line pressure regulators have been generated in accordance with ISO 2503 which requires the upstream pressure to be approximately twice that of the downstream pressure.

PORTING CONFIGURATIONS



Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues. Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Units 1-2, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH

+44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2026 Pressure Tech Ltd. All Rights Reserved.

290426

PAGE:
3 OF 4

SGP Datasheet


SPECIALITY GAS POINT OF USE GAS MANIFOLD



Gas
 Liquid
 Diaphragm
 Piston
 Self-Venting
 Non-Venting
 Max Inlet: 50 bar (725 psi)
 Max Outlet: 14 bar (203 psi)
 Cv 0.1

ORDERING INFORMATION

To build a Pressure Tech part number, simply combine the characters identified below in sequence:

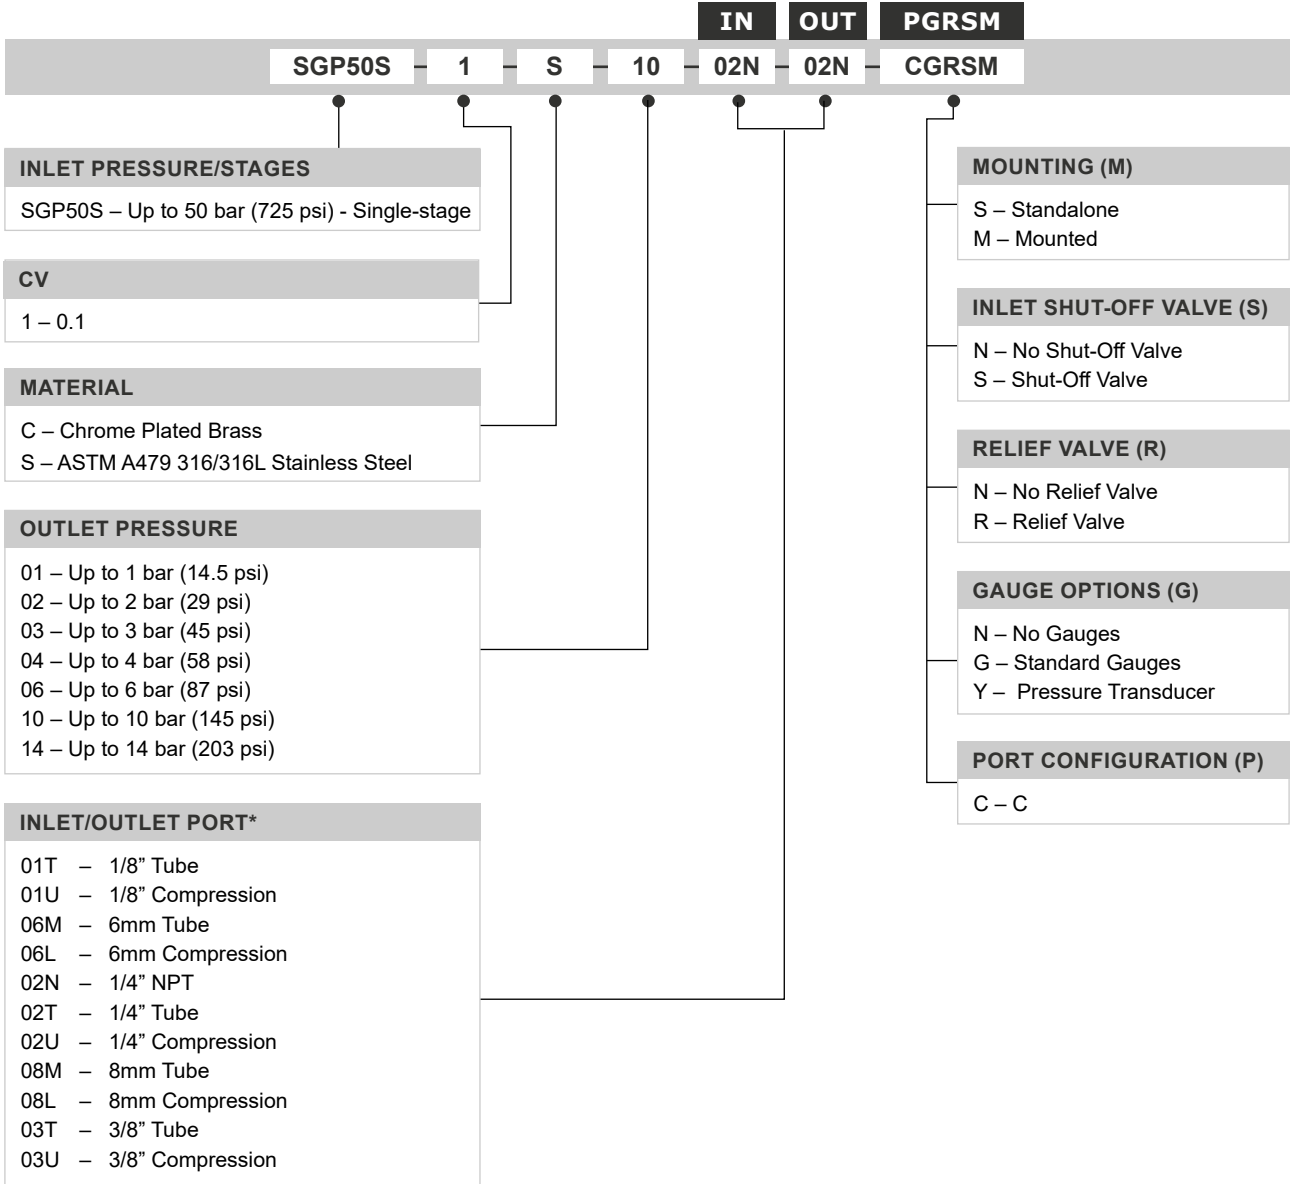

TRADEMARKS: Inconel® is a registered trademark of Inco Alloys International
 Hastelloy® is a registered trademark of Haynes International, Inc

* Other options available

Product availability and specifications contained herein are subject to change without notice. Consult local distributor or factory for potential revisions and/or service related issues.
 Pressure Tech Ltd support with product selection recommendations only - it is the users responsibility to ensure the product is suitable for their specific application requirements.



PRESSURE TECH LTD

Units 1-2, Graphite Way, Hadfield, Glossop, Derbyshire, UK, SK13 1QH
 +44 (0)1457 899 307 | sales@pressure-tech.com | www.pressure-tech.com

DESIGNED, MANUFACTURED AND BUILT IN THE UK

© 2026 Pressure Tech Ltd. All Rights Reserved.

290426

PAGE:
4 OF 4